

LINDY®

CONNECTION PERFECTION

2 Port VGA Splitter Pro

User Manual

English



LINDY No. 32569

www.lindy.com



as you add further units further away from the video signal source.

Note: If you connect a DDC type monitor to 'VGA Out' port No. 1, all other monitors must be able to support the highest resolution that the DDC monitor can provide!

Technical Features:

- Video bandwidth 350 MHz
- Resolution up to 2048 x 1536
- Supports: VGA, S-VGA, XGA, X-VGA, QXGA and Multi-sync
- Improves signal quality over cable distances up to 55m
- Supports DDC, DDC2, DDC2B (Port1 only)
- Cascadable
- Full metal housing
- Small form factor

Please note: we recommend using LINDY Premium or Premium Gold cables in conjunction with our VGA Splitter Pro range. Please visit our website to view the full range

Installation


Steps for a single stage installation:

1. Use a high quality HD15 Male/Female video extension cable to connect the PC's video port to the 'VGA In' port of the video splitter.
2. Use high quality HD15 Male/Male video cables to connect the 'VGA Out' ports of the video splitter to the monitors; unless your monitors have got mounted video cables on them in which case you would need video extension cables.
3. Plug the power adapter into an AC source; and then plug the power adapter cable into the video splitter's power jack.
4. Power up the video splitter, power up the monitors and power up the PC in that order.


Cascading:

To provide video display for more monitors than the number of available 'VGA Out' ports on your video splitter, additional video splitters can be cascaded. Use a high quality HD15 Male / Female video extension cable to connect an available 'VGA Out' port on the higher level video splitter to the 'VGA In' port of the lower level video splitter. Theoretically there is no limit to the number of levels in the chain but be aware that the signal quality may deteriorate

Typical Installation Example:

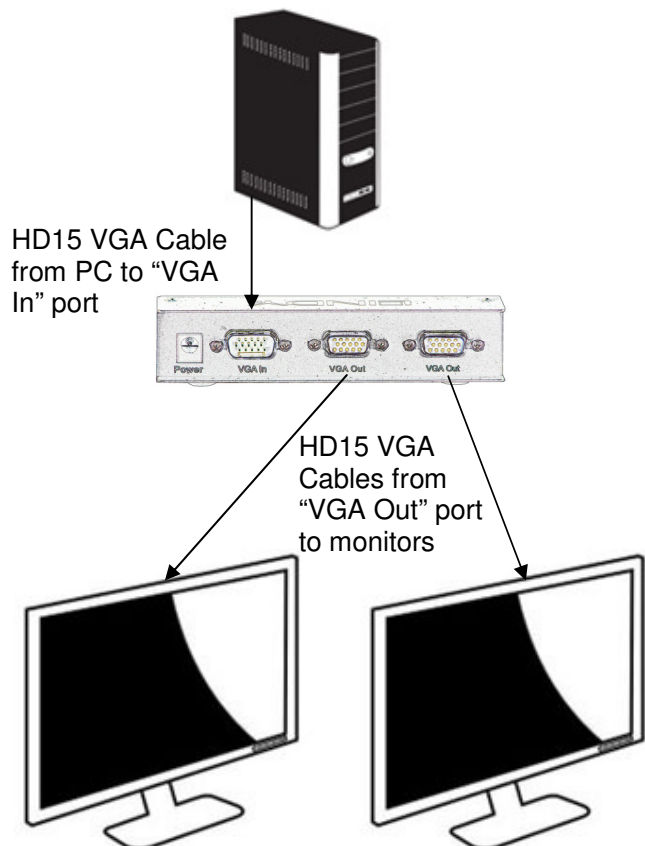

Example of Cascading:

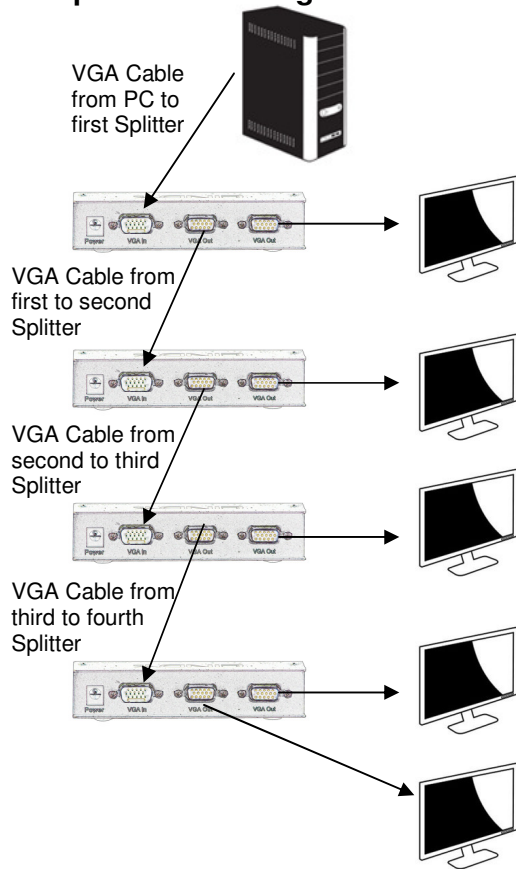

Certifications

FCC Certifications

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received; including interference that may cause undesired operation.

CE Certification

This equipment complies with the requirements relating to electromagnetic compatibility, EN 55024 and EN55022 class A for ITE, EN61000-3-2/-3 the essential protection requirement of Council Directive 89/336/EEC on the approximation of the laws of the Member States relating to electromagnetic compatibility.

Recycling Information



WEEE (Waste of Electrical and Electronic Equipment),
Recycling of Electronic Products

United Kingdom

In 2006 the European Union introduced regulations (WEEE) for the collection and recycling of all waste electrical and electronic equipment. It is no longer allowable to simply throw away electrical and electronic equipment. Instead, these products must enter the recycling process. Each individual EU member state has implemented the WEEE regulations into national law in slightly different ways. Please follow your

national law when you want to dispose of any electrical or electronic products. More details can be obtained from your national WEEE recycling agency.

Germany / Deutschland

Die Europäische Union hat mit der WEEE Direktive umfassende Regelungen für die Verschrottung und das Recycling von Elektro- und Elektronikprodukten geschaffen. Diese wurden von der Bundesregierung im Elektro- und Elektronikgerätegesetz – ElektroG in deutsches Recht umgesetzt. Dieses Gesetz verbietet vom 24.März 2006 an das Entsorgen von entsprechenden, auch alten, Elektro- und Elektronikgeräten über die Hausmülltonne! Diese Geräte müssen den lokalen Sammelsystemen bzw. örtlichen Sammelstellen zugeführt werden! Dort werden sie kostenlos entgegen genommen. Die Kosten für den weiteren Recyclingprozess übernimmt die Gesamtheit der Gerätehersteller.

France

En 2006, l'union Européenne a introduit la nouvelle réglementation (DEEE) pour le recyclage de tout équipement électrique et électronique. Chaque Etat membre de l' Union Européenne a mis en application la nouvelle réglementation DEEE de manières légèrement différentes. Veuillez suivre le décret d'application correspondant à l'élimination des déchets électriques ou électroniques de votre pays.

Italy

Nel 2006 l'unione europea ha introdotto regolamentazioni (WEEE) per la raccolta e il riciclo di apparecchi elettrici ed elettronici. Non è più consentito semplicemente gettare queste apparecchiature, devono essere riciclate. Ogni stato membro dell' EU ha tramutato le direttive WEEE in leggi statali in varie misure. Fare riferimento alle leggi del proprio Stato quando si dispone di un apparecchio elettrico o elettronico. Per ulteriori dettagli fare riferimento alla direttiva WEEE sul riciclaggio del proprio Stato.

LINDY No. 32569

www.lindy.com

Date 30th April 2010

